



# IK-10A


## Washing Tank

### Specification

Parameters	
Applicable Model	With B: SN-CHP86xxCDN, SN-CHP86xxCDR, SN-CHP86xxEBR With P: SN-CHP86xxPAN, SN-IPT86xxPAR
Material	Stainless steel 316L
Water Tank	5L/10L
Water Spray Form	Atomizing
Clean Agent	Windshield washer fluid
Power Supply	Standard: 24 VDC, Optional: 24 VAC/100 V to 240 VAC
Max Current	1.2 A (24VDC type)
Max Flow	0.45 GPM (1.7 L/min)
Max Pressure	130 PSI (0.9 MPa)
Control Interface	RS-485, By preset
Protocol	Pelco-D
Baud Rate	9600
Device Address	3
Additional Integration	Water pump control
Mounting Method	Ground-mounted
Ambient Temperature	-40°C to +60°C
Relative Humidity	No more than 95% (± 25°C)
Ingress Protection	IP66
Product Dimensions	400.4 × 236 × 716 mm (15.76 × 9.29 × 28.19 inch)
Product Weight	27 kg (59.52 lb) without water



## Dimensions (mm)

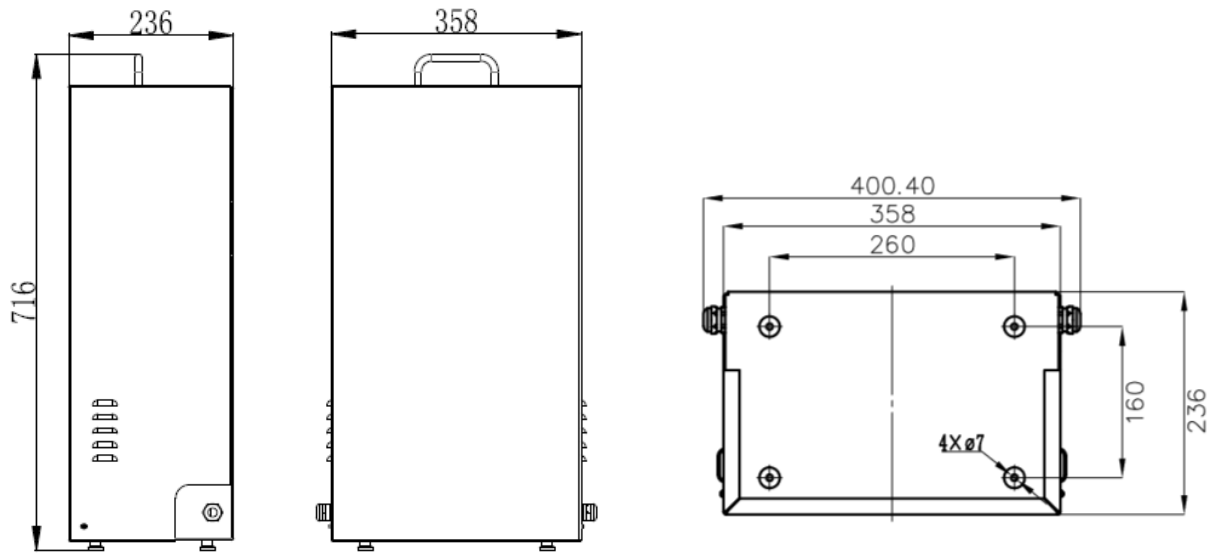

## System Connection

