


IK-NR9216-I

16CH 2HDD 4K NVR

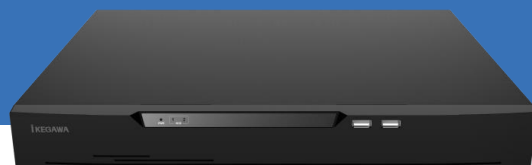

Key Features


- Up to 16-ch IP cameras access
- Up to 288 Mbps incoming/outgoing bandwidth
- Up to 1-ch @ 12MP/4-ch @ 8MP/8-ch @ 4MP /16-ch @ 1080P decoding capacity
- Support face recognition and multi-objective recognition
- Supports some specialist cameras, including people counting camera, ANPR camera, fisheye camera, panoramic camera and thermal camera
- Support fisheye Dewarping and VCA alarm linkage
- Up to 16-ch perimeter protection
- 2 × RJ45 1000M network interface
- Support 2 HDMI and 1 VGA interface

Specification

Video Input	
IP Camera Input	16 Channel
Incoming Bandwidth	288 Mbps (160 Mbps with AI enabled)
Outgoing Bandwidth	288 Mbps (160 Mbps with AI enabled)
Video Output	
HDMI Output 1	3840 × 2160, 1920 × 1080, 1280 × 1024, 1024 × 768
HDMI Output 2	1920 × 1080, 1280 × 1024, 1024 × 768
VGA Output	1920 × 1080, 1280 × 1024, 1024 × 768
Different Source Output	Supported
Decoding Capacity	1ch 12MP, 4ch 8MP, 8ch 4MP, 16ch 1080P
Dual Stream	Supported
Multi-screen Display	Default Mode (Mirrored): 1/4/8/9/16 Auxiliary Screen Mode: - Main Screen: 1/4/8 - Auxiliary Screen: 1/4/8
AI Recognition	
Face Comparison	Real-time captured and display faces comparison results (stranger, channel, similarity)
Multi-objective	Real-time captured and display vehicle, human body, non-motor vehicle, license plates image
Smart Search	Time, Properties, Pictures, License plate
Trigger Events	Buzzer, Alarm push, Email, Alarm Out, Compare the result simultaneously, etc.
Recoding	
Resolution	12MP, 8MP, 6MP, 5MP, 4MP, 3MP, 1080P, 720P, D1 etc.
Recording Mode	Manual, Schedule (Regular, Continuous), Event
Trigger Events	Motion Detection, Video Loss, Alarm in, IVS
Playback and Backup	
Sync Playback	16/9/4/1
Search Mode	Time /Date, Alarm, Picture grid, Event
Backup Mode	USB Device, Network, eSATA
Alarm	
General Alarm	Motion Detection, Video Loss, Alarm in, Alarm out
Intelligent Analysis (By Camera)	Smoking Detection, Smoke and Fire Detection, Fire Spot Detection, Intrusion, Single Line Crossing, Double Line Crossing, Loitering, Wrong-way, Illegal Parking, People Counting, Smart motion detection, Enter Area, Leave Area, etc.

Abnormal Alarm	Disk Alarm, IP Address Conflict, Network Disconnect
Intelligent Analysis (By NVR)	16-ch intrusion detection, support the accurate detection of human and vehicle
Event Action	Buzzer, Push message to APP, Full screen, Email, FTP, PTZ, Alarm output, Recording
Network	
Network Protocol	HTTP, HTTPS, TCP/IP, IPv4, IPv6, UPnP, UDP, RTSP, SMTP, NTP, DNS, DHCP, FTP, P2P, IP Filter, DDNS, 802.1X, SNMP, 3G/4G, PPPoE
Remote Users	8 users
P2P	P2P, Web NAT
Interoperability	ONVIF, SDK, CGI
Storage	
ANR	Supported
Disk Group	Supported
Interface	
HDD Interface	2 SATA interfaces, up to 12TB capacity for each disk
Network Interface	2 × RJ-45, 10/100/1000 Mbps self-adaptive Ethernet port
eSATA	1 eSATA Interface
HDMI	2
VGA	1
Audio In/Out	1/1
Alarm In/Out	6/2
USB Interface	Front panel: 2 × USB 2.0, Rear panel: 1 × USB 3.0
RS-485 Interface	1
Reset Button	On-board reset button
General	
Power Supply	DC12V/3A
Power Consumption	< 15 W (without HDD)
Operating Conditions	-10 °C to 50 °C (14 °F to 122 °F)
Storage Conditions	Less than 90% RH
Certifications	CE/FCC
Dimensions	372 × 311.2 × 46.4 mm (14.65 × 12.25 × 1.83 inch)
Net Weight	2.05 kg (4.52 lb) without HDD

Dimensions (mm)

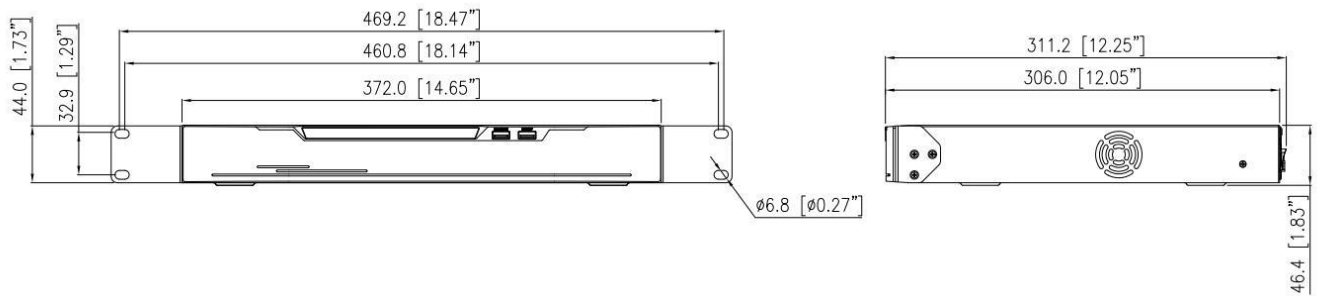

Rear Panel

