

IK-B6468NS-B

4MP Smart Dual Illumination Bullet Network Camera



Key Features

- 1/3" progressive scan CMOS
- Max. 4MP(2560 × 1440) @25fps resolution
- Supports face, human, and vehicle detection.
- Intelligent analytics: Intrusion, smart motion detection, and line crossing
- DWDR, 3D DNR, ROI, HLC, BLC, Defog
- Built-in microphone and SD card slot, up to 1TB microSD card
- Built-in IR and warm LEDs, illumination distance up to 30m
- IP67-rated housing


Specifications

| Camera | |
|-----------------------|---|
| Image Sensor | 1/3" Progressive Scan CMOS |
| Max Resolution | 4MP, 2560(H) × 1440(V) |
| Shutter Speed | 1/5 to 1/20,000s |
| Min Illumination | Color: 0.01 Lux @ (F1.6, AGC ON), B/W: 0.005 Lux @ (F1.6, AGC ON), 0 Lux with illuminator on |
| Day & Night | Auto (ICR) |
| Angle Adjustment | Pan: 0° to 360°, Tilt: 0° to 90°, Rotation: 0° to 360° |
| Lens | |
| Lens Type | Fixed lens, fixed focal |
| Focal Length | 2.8 mm |
| Max. Aperture | F1.6 |
| Field of View (FOV) | H: 96.6°, V: 53.2° |
| Iris | Fixed Iris |
| Illuminator | |
| Type | IR, Warm light |
| IR wavelength | 850 nm |
| Distance | IR distance up to 30 m (98.4 ft) Warm light distance up to 20 m (65.6 ft) |
| Control | IR mode, White mode, Intelligent mode, None |
| Intelligent Analytics | |
| AI Multi-Target | Supports face, human, and vehicle detection |
| Intelligent Analysis | Intrusion, smart motion detection, line crossing - Supports accurate target classification (human/vehicle) |
| Video & Audio | |
| Number of Streams | 3 Streams |
| Resolution | Stream1: 2560×1440, 2304×1296, 1920×1080, 1280×720 Stream2: D1, VGA, 640×360, CIF, QVGA Stream3: VGA, CIF, QVGA |
| Frame Rate | Up to 25fps |
| Bit Rate Control | CBR/VBR |
| Bit Rate | Stream1: 100 Kbps to 6 Mbps Stream2: 100 Kbps to 6 Mbps Stream3: 100 Kbps to 3 Mbps |

| | |
|-----------------------------------|--|
| Smart Encoding | Supported |
| Region of Interest (ROI) | 8 areas, rectangle zones |
| Audio Compression | G.711 A-law, G.711 μ -law, RAW_PCM |
| Audio Bit Rate | 64 Kbps (G.711), 128 Kbps (RAW_PCM) |
| Image | |
| Image Adjustment | Brightness, Sharpness, Contrast, Saturation adjustable |
| Scene Mode | Indoor, Outdoor, Mirror, Corridor mode |
| Exposure Mode | Auto, Manual, Shutter priority |
| White Balance | Auto, Tungsten, Fluorescent, Daylight, Shadow, Manual |
| Day/Night Setting | Auto, Day, Night, Timer |
| Noise Reduction | 2D/3D DNR |
| Image Enhancement | HLC, BLC, Defog, WDR |
| Wide Dynamic Range | DWDR |
| Privacy Masking | 4 areas |
| Event | |
| Alarm Triggers | IVS, Motion detection, Disk alarm, Network alarm, Day/Night switch alarm, Abnormal sound detection |
| Event Actions | Alarm record, FTP upload, SMTP upload, White light alarm output |
| Network | |
| Protocols | IPv4/IPv6, HTTP/HTTPS, DNS, DDNS, DHCP, PPPoE, RTSP/ RTCP/RTP, TCP/UDP, NTP, ARP, UPnP, FTP, SMTP, QoS, ICMP, IGMP, SMT, 802.1x, SNMP, Multicast |
| Application Programming Interface | ONVIF (Profile S/T/G/M), SDK, CGI |
| Max Concurrent Streams | 10 channels |
| User/Host Level | 32+ users, 3 levels: Administrator, Operator, Media user |
| Web Viewer | <IE11, Chrome, Firefox, Microsoft Edge |
| Security | |
| OS / Firmware Protect | Encrypted firmware, Secure boot, Signed firmware |
| User Authentication | Digest authentication, Prevent brute-force attack |
| Network Authentication | IEEE 802.1X (EAP-TLS) |
| Secure Communication | HTTPS, WSS (WebSocket Secure), SRTP |
| Access Control | IP-based access control, Auto logout |
| Data Protect | Encryption credentials |
| Audit | Access / System / Event Log management |
| Supply Chain Security | SBOM |
| Interface | |
| Network Interface | 1 \times Ethernet (10/100 Base-T), RJ-45 connector |

| | |
|---|--|
| Built-in Microphone | Supported |
| SD Card Slot | Built-in microSD card slot, up to 1 TB |
| Reset Button | Supported |
| General | |
| Language | English, Chinese, Traditional Chinese, Polish, Italian, Portuguese, Spanish, Russian, French, Czech, Hungarian, Japanese, Korean. Default: English |
| Power Supply | 12 VDC (-15% to +25%)/PoE (802.3af) |
| Power Consumption | Typical: 1.8 W (IR off, 12 VDC) / approx. 2.3 W (PoE) Max: 5.7 W (IR on, 12 VDC) / approx. 7.1 W (PoE) |
| Operating Temperature | -30°C to 60°C (-22°F to 140°F) |
| Operating Humidity | Less than 95% RH |
| Ingress Protection | IP67 (housing) |
| Certifications | CE-EMC - EN 55032, EN IEC 61000-6-4, EN IEC 61000-3-2, EN 61000-3-3, EN 55035, EN 50130-4 FCC 47 CFR Part 15 Subpart B |
| Material | Aluminum alloy |
| Dimensions | 189.75 × 76 × 76 mm (7.47 × 2.99 × 2.99 in) |
| Net Weight | Approx. 515 g (1.14 lb) |
| DORI Distance (EN62676-4 standard) | |
| Detect | 64 m (210.0 ft) |
| Observe | 35.6 m (116.8 ft) |
| Recognize | 12.8 m (42.0 ft) |
| Identify | 6.4 m (21.0 ft) |

Dimensions (mm)

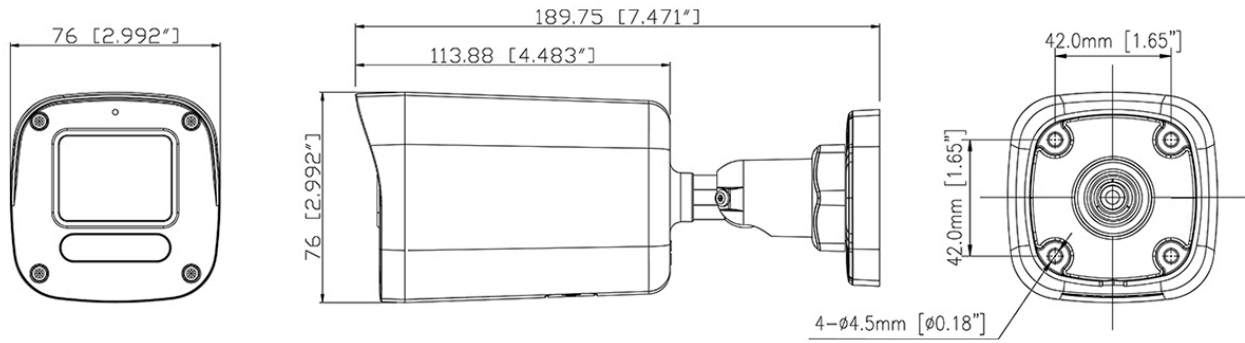

Accessories

Optional:



IK-AJ56A
Junction Box



IK-AP27D
Pole Mount